


Extruded Brick Slip (9mm)

Product Technical Information Sheet

Wienerberger Code	Various
Production Plant	Ammonit GmbH & Co. KG (Germany)
Manufacturing Method	Extruded
Colour	Various
Surface Texture	Various
Work Size	215 x 65 x 9mm
Individual Dry Brick Weight	0.30kg

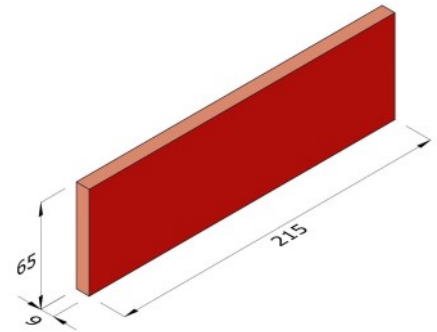

Technical Properties to BS EN 14411

Reaction to Fire	A1
Durability (Freeze/Thaw)	Passed - EN ISO 10545-12
Thermal Shock Resistance	Passed - EN ISO 10545-9
Tolerances (Length & Height) +/-2% to a Max of +/- 4mm	Passed - EN ISO 10545-2
Tolerances (Surface Flatness) +/- 1.5%	Passed - EN ISO 10545-2
Water Absorption	<3% Passed - EN ISO 10545-3
Pore Radius	>0.2µm Passed - DIN 66 133:1993-06
Pore Volume	>20mm ³ /g Passed - DIN 66 133:1993-06
Surface Quality	Minimum 95% Free from Visible Defects - EN ISO 10545-2

Issue Date: 04/10/2021

Technical data correct at time of issue. Individual dry brick weights can vary and are for guidance only. Any questions regarding this data should be referred to the Wienerberger Technical Department. Due to the limitations of screen and print colour representation of product images it is advised that brick samples are viewed prior to ordering.



**BIM Objects
Download**

