



# Actua

## Large Format Interlocking Clay Tile

Contemporary, large format, flat interlocking clay tile which has been designed to perform down to 22.5°.



# Actua: Large Format Interlocking Clay Tile

## Features and benefits:

- Easy to lay interlocking clay tile
- Natural & colour-permanent clay tile
- Reduces completion times
- Performs at pitches down to 22.5°

| TECHNICAL DATA                                   |  |
|--|--|
| Minimum roof pitch*                              | 22.5° at 102 mm headlap                              |
| Headlap (minimum)                                | 102 mm   |
| Headlap (maximum)                                | 162 mm   |
| Batten spacing at maximum gauge                  | 370 mm   |
| Batten spacing at minimum gauge                  | 310 mm   |
| Size of tile                                     | 472 x 303 mm   |
| Covering capacity at maximum gauge               | 10.5 tiles per m <sup>2</sup><br>(at 102 mm headlap) |
| Cover width                                      | 261 mm   |
| Profile depth                                    | 31 mm  |
| Hanging length                                   | 440 mm   |
| Weight as laid                                   | 46.2kg per m <sup>2</sup><br>(at 102 mm headlap)     |
| Weight per 1000                                  | 4.4 tonnes   |
| Weight per tile                                  | 4.4 kg   |
| Weight per pallet (including pallet & packaging) | 1.1 tonnes   |
| Quantity per pallet                              | 240  |
| Battens per m <sup>2</sup>                       | 2.7 m (at 102 mm headlap)                            |
| Batten size - up to 450 mm rafter centres        | 38 x 25 mm   |
| Batten size - up to 600 mm rafter centres        | 50 x 25 mm   |
| Nail size/type for tiles                         | 55 x 3.35 mm aluminium ring shank clout head         |
| Nail size/type for metal tile clips              | Integrated with clip                                 |

Note: Unless otherwise stated, data is based on tiles laid at minimum headlap. Rafter length restrictions apply at minimum roof pitch. Please contact Technical Services for further information. Clay tiles are subject to small variations in size because of drying and firing shrinkage in the manufacturing process. Therefore, before deciding on the batten gauge and cover width, the roof tiler should inspect each batch of tiles to ensure that the correct minimum headlap and sidelap are achieved.

## Sandtoft Roof Tiles

Belton Rd  
Sandtoft  
Doncaster  
DN8 5SY

T 0844 9395 900  
F 0844 9395 950  
sandtoftorders@wienerberger.com  
www.sandtoft.com  
www.wienerberger.com

## THE RANGE


### Actua Slate Engobe



### Actua Multiblend



### Actua Natural Red

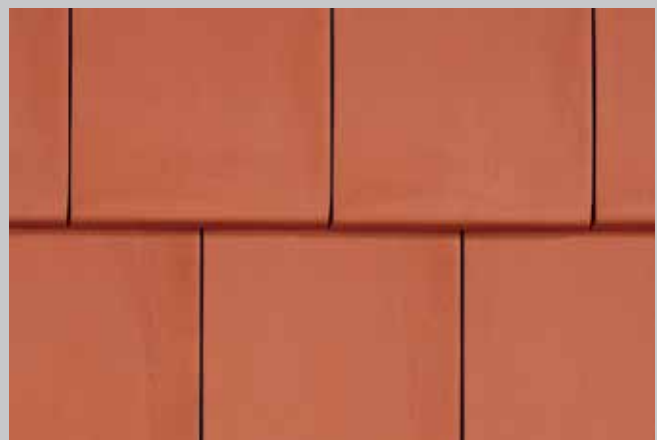

■ Samples available on request