



# Actua

## Large Format Interlocking Clay Tile

Contemporary, large format, flat interlocking clay tile which has been designed to perform down to 22.5°.



# Actua: Large Format Interlocking Clay Tile

## Features and benefits:

- Easy to lay interlocking clay tile
- Natural & colour-permanent clay tile
- Reduces completion times
- Performs at pitches down to 22.5°

TECHNICAL DATA	
Minimum roof pitch*	22.5° at 102 mm headlap
Headlap (minimum)	102 mm
Headlap (maximum)	162 mm
Batten spacing at maximum gauge	370 mm
Batten spacing at minimum gauge	310 mm
Size of tile	472 x 303 mm
Covering capacity at maximum gauge	10.5 tiles per m <sup>2</sup> (at 102 mm headlap)
Cover width	261 mm
Profile depth	31 mm
Hanging length	440 mm
Weight as laid	46.2kg per m <sup>2</sup> (at 102 mm headlap)
Weight per 1000	4.4 tonnes
Weight per tile	4.4 kg
Weight per pallet (including pallet & packaging)	1.1 tonnes
Quantity per pallet	240
Battens per m <sup>2</sup>	2.7 m (at 102 mm headlap)
Batten size - up to 450 mm rafter centres	38 x 25 mm
Batten size - up to 600 mm rafter centres	50 x 25 mm
Nail size/type for tiles	55 x 3.35 mm aluminium ring shank clout head
Nail size/type for metal tile clips	Integrated with clip

Note: Unless otherwise stated, data is based on tiles laid at minimum headlap. Rafter length restrictions apply at minimum roof pitch. Please contact Technical Services for further information. Clay tiles are subject to small variations in size because of drying and firing shrinkage in the manufacturing process. Therefore, before deciding on the batten gauge and cover width, the roof tiler should inspect each batch of tiles to ensure that the correct minimum headlap and sidelap are achieved.

## Sandtoft Roof Tiles

Belton Rd  
Sandtoft  
Doncaster  
DN8 5SY

T 0844 9395 900  
F 0844 9395 950  
sandtoftorders@wienerberger.com  
www.sandtoft.com  
www.wienerberger.com

## THE RANGE


### Actua Slate Engobe



### Actua Multiblend



### Actua Natural Red

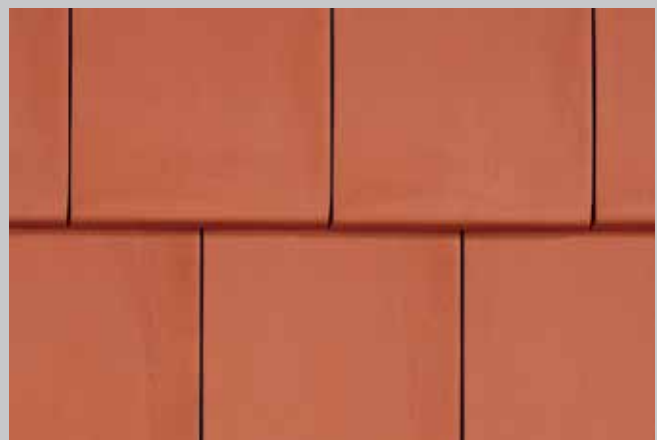

■ Samples available on request